



NE

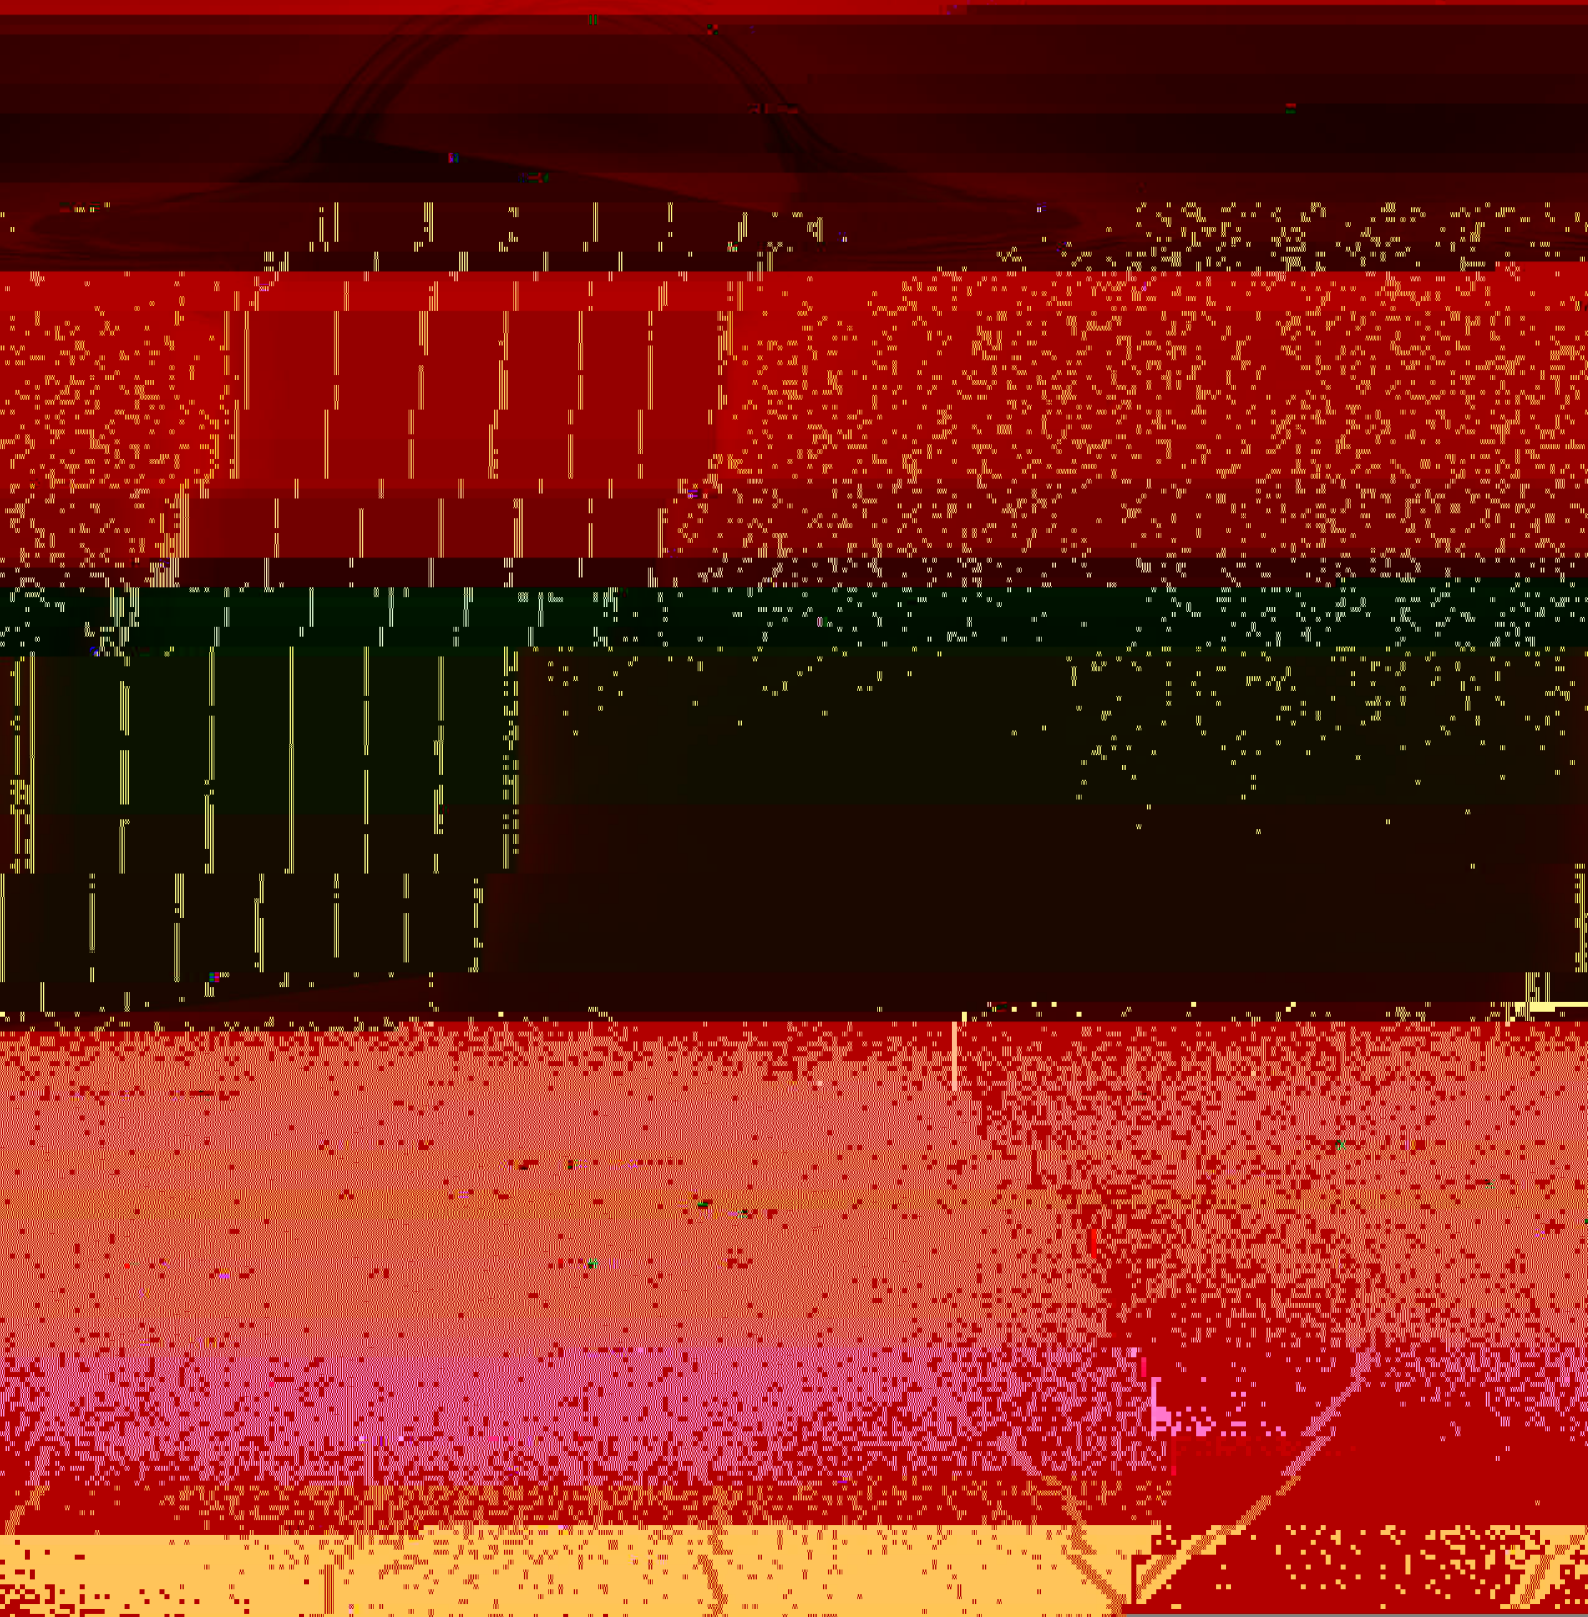

Annual Degradation from Year 2-30

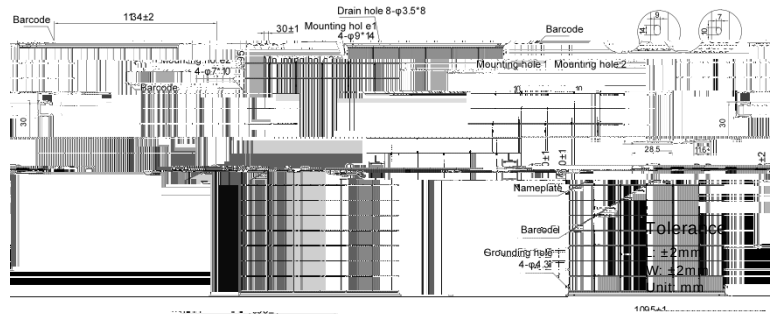

Bifacial Factor	80±5%
Cell Type	N-Type ABC
Front Cover	2.0mm coated semi tempered glass
Rear Cover	2.0mm semi tempered glass
Frame	Black anodized aluminum
Cable	4mm²(IEC) 12AWG(UL) ±1200mm
No. of Cells	96(6*16)
Junction Box	IP68, 3 bypass diodes
Connector	Original MC4-EVO2A
Weight	24.1kg±3%
Dimension	1762*1134*30mm
Package Detail	37pcs per pallet / 222pcs per 20'GP / 962pcs per 40'HC

Temperature Coefficient of I _{sc}	+ 0.05%/ °C	
Temperature Coefficient of V _{oc}	- 0.22%/ °C	
Temperature Coefficient of P _{max}	- 0.26%/ °C	
NOCT(Nominal Operating Cell Temperature)	45	±2
Operation Temperature	-40	- + 70
Maximum Series Fuse Rating	30A	
Protection Class	Class	
Maximum System Voltage	DC1500V	
Maximum Static Loading	Front 5400Pa Back 2400Pa	
Hail Test	25 mm diameter hail at 23 m/s	
Fire Rating	IEC Class A	

SECRET